

GENERAL SPECIFICATION

Product overview:

Tray portrays a picture frame design. Our intention was to evoke the idea of empty picture frames, characterized by a similar concave design, for use in high-end architectural environments. Tray is a fresh contemporary alternative to traditional lightbox style fixtures. With sloped back and side surfaces, Tray creates depth when viewed from non-frontal angles. Tray Wall features reduced lumen packages for optimized visual comfort.

Housing: Aluminum and steel.

Finish: Polyester powder coated.

Diffuser: Opal polycarbonate.


Drivers: HPF electronic, 120-277V (EU-240V).

Remote emergency: Provides a 1.5 hour (3 hours for EU) emergency lighting facility. The remote system includes the inverter module, NiCad or NiMH batteries and a remote wall/ceiling LED charge indicator and test switch (NA only) Maximum distance between wall/ceiling plate and luminaire is 4.5m/15'. Test switch fits a single gang box (not supplied).

Mechanical: Mounts directly to a standard electrical junction box (by others - North America only).

Delivered lumens: Delivered lumens & LPW based on 4000K (min 80 CRI).

MOUNTING & OPTICS



Wall Direct

HOW TO ORDER

A SPECIFY LUMINAIRE

Code:	Size:	Wattage:	Delivered lms:	LPW:
AG1	305mm/12" x 635mm/25"	6W	677	121
AG2	305mm/12" x 1143mm/45"	14W	1722	122
AG3	305mm/12" x 2388mm/94"	34W	4249	126
AG4	508mm/20" x 762mm/30"	27W	3838	140
AG5	508mm/20" SQ	14W	1907	139
AG6	765mm/30" SQ	55W	7629	139

B SPECIFY CCT

J2	3000K (min 80 CRI)
J3	3500K (min 80 CRI)
J4	4000K (min 80 CRI)

C SPECIFY DIMMING

D1	0-10V Dimming (1.0%)
D2	0-10V Dimming (0.1%)
D3	347V, 0-10V Dimming (1.0%)
D4	DALI Dimming (0.1%)
D5	DALI Dimming (1.0%)
D6	DSI (EU only)
D7	switchDim (EU only)

Additional Information

D6 & D7 dimming not available in North America

D SPECIFY FINISH - FRONT FRAME

G1	White
G20	Silver Metallic
G25	Gold Metallic
G44	Midnight Blue Metallic - Textured
G45	Copper Metallic
G46	Charcoal Metallic - Textured
G47	Bronze Metallic - Textured
G50	Black Metallic - Textured
G52	Champagne Metallic
G53	Red Metallic - Textured

E SPECIFY FINISH - BACK FRAME

H1	White
H20	Silver Metallic
H25	Gold Metallic
H44	Midnight Blue Metallic - Textured
H45	Copper Metallic
H46	Charcoal Metallic - Textured
H47	Bronze Metallic - Textured
H50	Black Metallic - Textured
H52	Champagne Metallic
H53	Red Metallic - Textured

F SPECIFY LUMEN OUTPUT

L0	100% of standard output
L1	Lumen & wattage reduction to approximately 75% of standard output
L2	Lumen & wattage reduction to approximately 50% of standard output

Additional Information

AG1 not available with L1 or L2

G SPECIFY EMERGENCY


E0	Emergency system not required
E2	Emergency system - Remote

EXAMPLE CODE


AG2/J3/D2/G53/H1/L0/E0

DIMENSIONAL DIAGRAMS

AG1

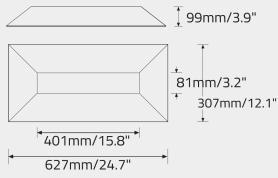


AG2

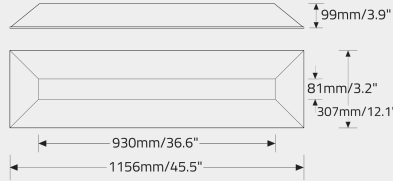


AG3




AG4



AG5



AG6



APPROVALS

