

Flexible outdoor led linear luminaire for direct view applications or details lighting

LIGHT OUTPUT

CCT/LED Colour (K)	2500K - 4800K
CRI	N/A
Luminaire Lumens	60
Optical Data/Beam Angle (°)	Diffused
LED Binning	3 SDCM

ELECTRICAL

Watts per metre (W/m)	15
Input Voltage	24 VDC (23V min, 25V max)
Connection Type	JST JWPF IP67
Maximum Chain Length (mm)	4800
Approx. Power Consumption (W)	1
Dimmable	Yes
Max Luminaire Length (mm)	4814


PHYSICAL & ENVIRONMENTAL

Finish	White PU Resin
Length (mm)	64
Ambient Storage Temperature (°C)	-30 to +85
Ambient Operating Temperature (°C)	-10 to +50
IP Rating	IP67
IK Rating	03
LED Pitch (mm)	Nothing to display
Cable Exit/Entry	Bottom Exit
Weight (g)	18.56

PRODUCT FEATURES

- Flexible PU resin luminaire.
 - Dimmable via remote LED driver.
 - Homogeneous dot free look.
- Outdoor rated to IP67 rating.
 - 3 SDCM LED binning.
 - 150mm / 5.90" bend radius
- 24 input for SELV compliance.
 - Chamfered ends for seamless end to end lit effects.

DIMENSIONS

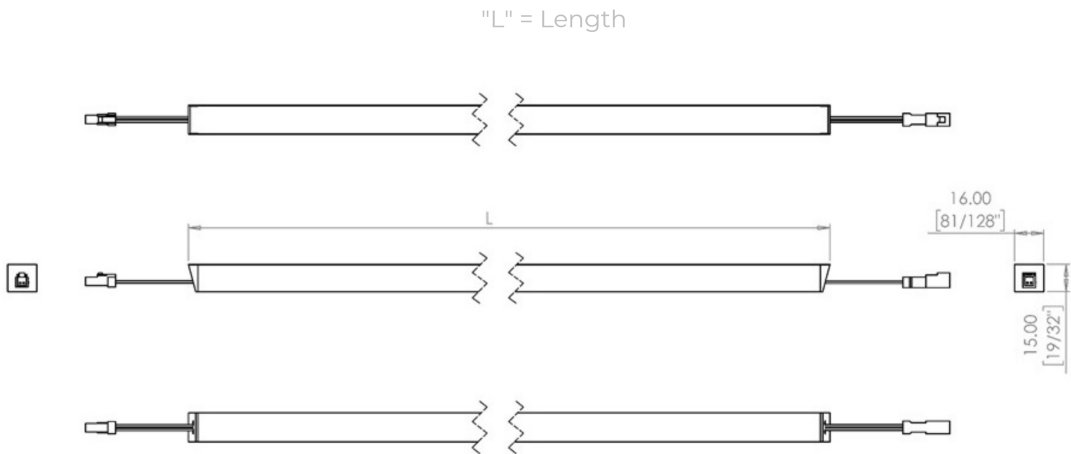

PART NUMBER:	VEX-FLEXI-LINE-T3-TW	-	2500K - 4800K	-	64	-	15W	-	IP67	-	DIF
--------------	----------------------	---	---------------	---	----	---	-----	---	------	---	-----

Provided data are typical values. Due to tolerances of the production process, figures for light output, electrical data etc can vary up to 10%. The Tc-point must be measured in thermal equilibrium in accordance with IEC EN 60598-1.