

Flexible outdoor LED luminaire for direct view applications

LIGHT OUTPUT

CCT/LED Colour (K)	2500
CRI	80
Luminaire Lumens	20
Optical Data/Beam Angle (°)	Diffused
LED Binning	3 SDCM

ELECTRICAL

Watts per metre (W/m)	6
Input Voltage	24 VDC (23V min, 25V max)
Connection Type	JST JWPF IP67
Maximum Chain Length (mm)	4800
Approx. Power Consumption (W)	1
Dimmable	Yes
Max Luminaire Length (mm)	4814


PHYSICAL & ENVIRONMENTAL

Finish	White PU Resin
Length (mm)	64
Ambient Storage Temperature (°C)	-30 to +85
Ambient Operating Temperature (°C)	-10 to +50
IP Rating	IP67
IK Rating	03
LED Pitch (mm)	8.33
Cable Exit/Entry	Bottom Exit
Weight (g)	18.56

PRODUCT FEATURES

- Flexible polyurethane resin luminaire
 - Dimmable via remote LED driver
 - Uses reel to reel LED tape
- Outdoor rated to IP67 rating
 - 3 SDCM LED binning
 - Chamfered ends for seamless end to end lit effect.
- 24V input for SELV compliance
 - Lumileds LED inside
 - 150mm / 5.90" bend radius

DIMENSIONS

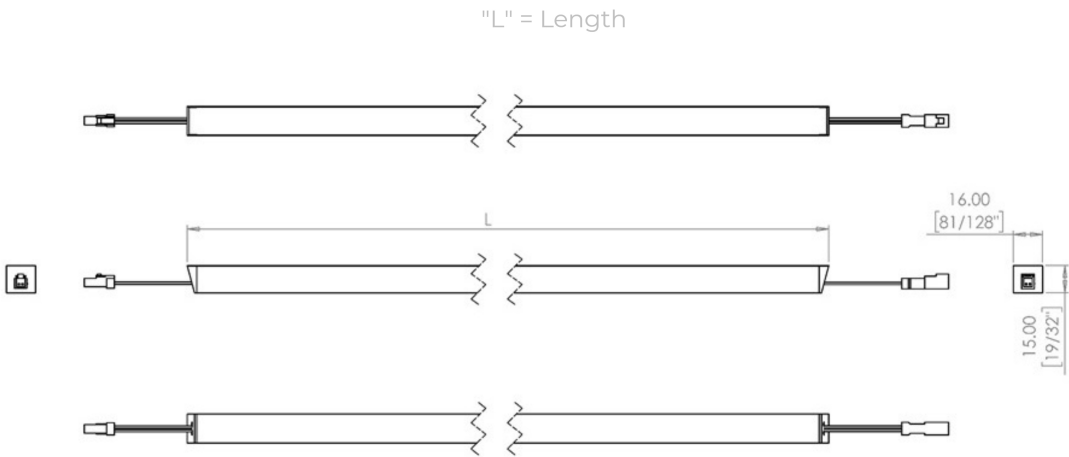

PART NUMBER: VEX-FLEXI-LINE-T3 - 2500K - 64 - 6W - IP67 - DIF

Provided data are typical values. Due to tolerances of the production process, figures for light output, electrical data etc can vary up to 10%. The Tc-point must be measured in thermal equilibrium in accordance with IEC EN 60598-1.