




HIGHLIGHTER® S E R I E S

HIGHLIGHTER®


A modular LED lighting system for large scale installations: architectural delineation of skyscrapers, bridges, airports, cove lighting for shopping malls, large offices where long runs are necessary.

Features:

- Power consumption: 5W maximum per 300mm/1ft
- 300mm/1ft modular design for curved or straight sections
- 18 mid-power LEDs per 300mm/1ft for perfectly uniform diffuser illumination
- RGB color changing or monochromatic LEDs
- LED pitch is maintained within and between luminaires: no dark spots between fixtures
- DMX, DALI or 0~10V dimming through GVA's power-data equipment
- Through wiring for end-to-end connection via snap-in connectors: no junction boxes
- LED modules sealed for outdoor use: IP66 rated
- Projected lifetime: 115,000hrs @ 23°C, 73°F (L70)
- Operating temperature: -40°C to +50°C, -40°F to 122°F
- INFINITY® technology: exceptionally long runs (up to 300m or 1000ft) from a single power source



Typical HL-DL Diagram

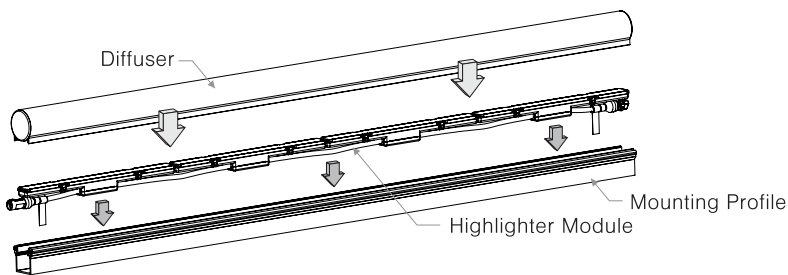

HIGHLIGHTER® ALL NEW

HIGHLIGHTER® HL-DL Round & Flat Diffusers New Niche Version



HIGHLIGHTER® HL-Cove Cove string in the tray



New HL-Cove module with Optics

Mounting Track | Adjustable Cove Brackets

HIGHLIGHTER® HL-DL


Direct view architectural delineation LED lighting system

Features:

- Up to 4000 cd/m2 luminance on diffuser surface
- Round diffuser: 50mm diameter
- Flat diffuser: 46mm wide x 20mm high
- Diffuser profiles: UV stable and impact resistant PMMA (acrylic), no yellowing over time
- Architectural grade anodized aluminum mounting profile, no visible fasteners

Options:

- Non-standard diffuser lengths
- Black or white diffuser shim
- Rear exit cables

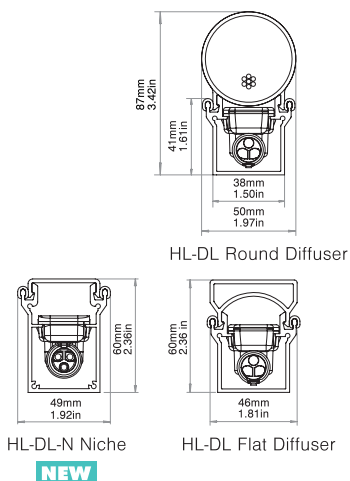

HIGHLIGHTER® HL-Cove


Architectural Cove Modular LED lighting system

Features:

- Up to 1500lm/m or 450lm/ft
- Adjustable aim mounting brackets: 0-90° in 10° increments for precise control of lighting effect
- Mounting tracks for easy luminaire alignment
- Small fixture size: 37mm/1.4" high, 55mm/2.1" wide

Options:

- HL-COVE Tray: mounting system with integrated glare control valance
- Outdoor cove mounting profile
- Fixed cove mounting profile
- Adjustable brackets for HL-Cove
- 15°, 30°, 60° optics (FWHM, under development)

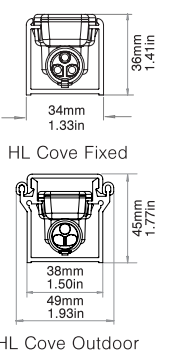

HIGHLIGHTER® HL-Cove-LITE™


Architectural Cove LED Luminaire

Features:


- Low cost per m/cost per ft option for Highlighter HL-COVE system
- 1800mm/6ft fixture length: ideal for long, straight runs
- Compatible with HL-COVE modules: can be paired for applications with both straight and curved sections
- Simplified indoor construction for reduced fixture cost: IP40 rated
- Small fixture size: 37mm/1.4" high, 55mm/2.1" wide

Options:

- HL-COVE Tray: mounting system with integrated glare control valance

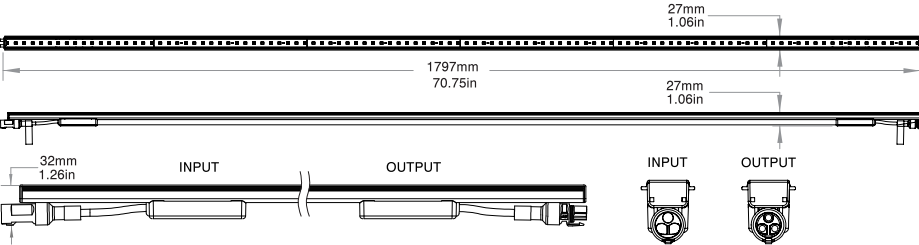

COVE TRAY

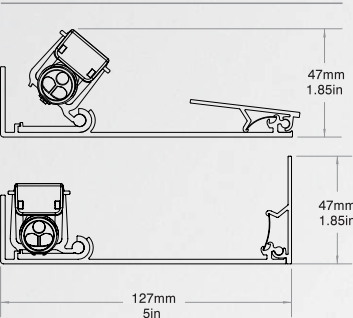

HIGHLIGHTER® HL-Cove-LITE™

INFINITY
GVA TECHNOLOGY

Lighting solutions for
mega projects:
Skyscrapers
Bridges
Airports
Shopping Malls

Deloitte Building / Montreal / Canada | HIGHLIGHTER® HL-DL & PDB-ELV Indoor

GVA Lighting, Inc.
3400 Ridgeway Drive, # 14
Mississauga, Ontario L5L 0A2, Canada

+ 1 877 482 5448 | USA & Canada Toll Free
+ 1 905 569 6044 | Worldwide

sales@gvalighting.com
marketing@gvalighting.com

GVA Lighting Europe Limited
The Light Bulb
Unit 223, 1 Filament Walk
London, SW18 4GQ, United Kingdom

+ 44 (0) 203 735 7322 | Landline
+ 44 (0) 79 6002 6935 | Cellular

europe@gvalighting.com

GVA
LIGHTING

Creating New Beauty
For Our Home Planet™

INFINITY
GVA TECHNOLOGY

gvalighting.com

HIGHLIGHTER®
S E R I E S