

technical data sheet // LED spotlight C1-S



description:	LED spotlight for installation in display cases
housing colour:	aluminium anodised black, silver, brass (other surface finishing on request)
LED type:	high power LED, high CRI
lifetime:	50000 hours
basis of lifetime:	L70B10
compliant to EMC:	DIN EN 55015:2013
light colour (+/- 100 K):	~2700 K, ~3000 K, ~4000 K, ~5700 K
max. luminous flux:	~150 lm
max. power consumption:	~2.1 W
LED driver:	external
power input:	constant current up to max. 700 mA
dimming:	external
protection class:	IP 20



- recommended accessory: - LED driver with constant current
- additional accessory: - lenses: 10°, 15°, 20°, 35°, 45° and 46°+10°
- honeycomb grid, anti-glare tube, inclined tube, light diffusion foil, barn door

Dimension

specification in mm

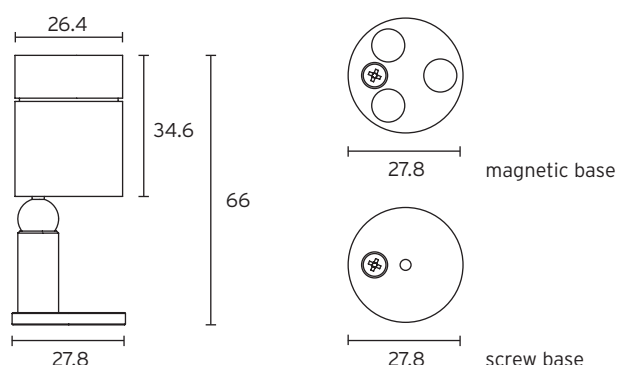

Test result

for light colour ~3.000 K // standard lens 20° // colour rendering index typ. 97, R9 > 90, R12 > 90 // colour variation ≤ 3 SDCM

