



technical data sheet // LED spotlight C2-S with single lens

description:	LED spotlight for installation in display cases 360° rotatable, 180° swivelled
housing colour:	aluminium anodised black, silver, gold (other surface finishing on request)
LED type:	high power LED, high CRI
lifetime:	50000 hours
basis of lifetime:	L70B10
compliant to EMC:	DIN EN 55015:2013
light colour (+/- 100 K):	~2700 K, ~3000 K, ~4000 K, ~5700 K
max. luminous flux:	~260 lm
max. power consumption:	~4.5 W
LED driver:	external
power input:	constant current up to max. 1200 mA
dimming:	external
protection class:	IP 20
allowed LED driver:	LED driver for the Micro Jolly, Mini Jolly, Maxi Jolly by TCI with constant current (other LED driver on request)
additional accessory:	- lenses: 14°, 25°, 60°, 40 + 15° - honeycomb grid, anti-glare tube, inclined tube, light diffusion foil, barn door




Dimension

specification in mm

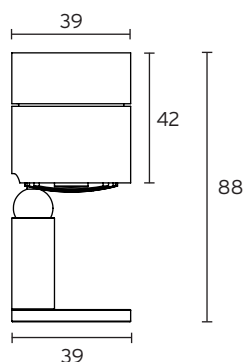

magnetic base



Test result

for light colour ~3.000 K // standard lens 25° // colour rendering index typ. 97, R9 > 90, R12 > 90 // colour variation ≤ 3 SDCM

