


technical data sheet // LED light bar for table R-SL-16-T

description:	LED light bar for table
housing colour:	aluminium anodised black, silver
LED type:	mid power LED, high CRI
lifetime:	50,000 hours
basis of lifetime:	L70B10
compliant to EMC:	DIN EN 55015:2013
light colour (+/- 100 K):	~2700 K, ~3000 K, ~4000 K
max. luminous flux:	~900 lm/m
max. power consumption:	~15 W/m
LED driver:	external
power input:	24V DC constant voltage
dimming:	external
protection class:	IP 20
optic:	linear optics with ~22°, ~35°, ~50° or ~55°



- recommended accessory: - power supply with constant voltage 24V DC, PWM dimmer
- additional accessory: - anti-glare profile aluminium anodised black, silver or powder-coated according to RAL
- light diffusion foil
- LED spotlight C1-mini-R-SL

Dimension

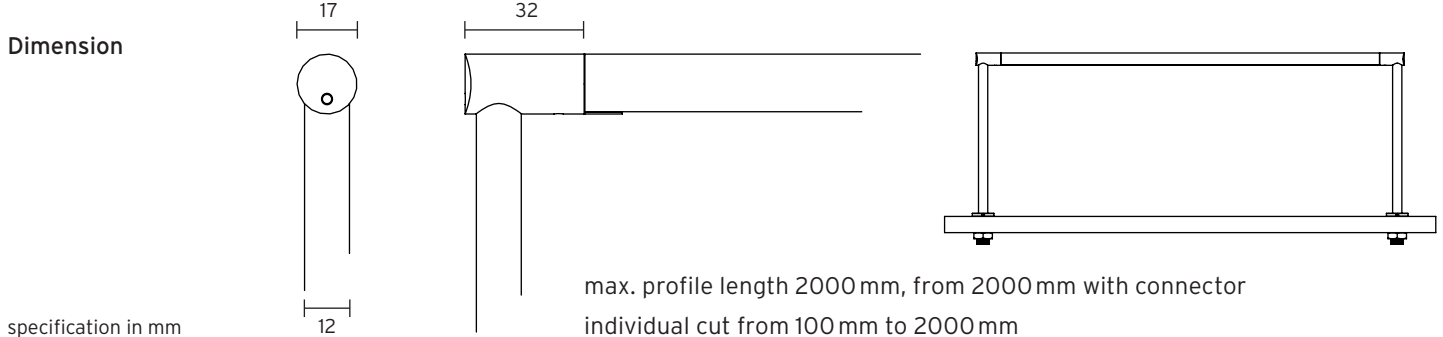

Test result

for light colour ~3000 K // linear optics ~50° // colour rendering index typ. 97, R9 > 90, R12 > 90 // colour variation ≤ 3 SDCM

