


Indoor | 48V fixtures | Yori Linear 48V / Prismatic

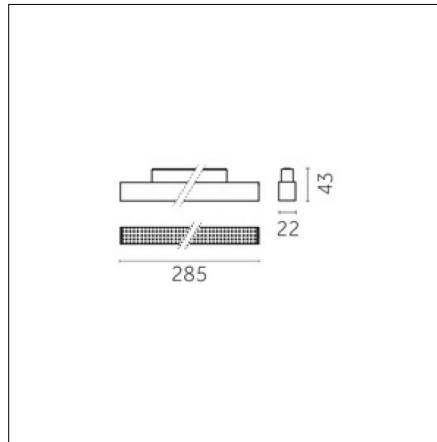

Very wide 57°/87°

21

IP20



Risk 1

850°



**Code 0.CN420.HN21**

### Light source features

**Number of light sources:** 1

**Source type:** LED HN

**Watt:** 5.4W

**Lm:** 810lm

**Lm/W:** 150lm/W

**Kelvin/CRI:** 4000K / >90

**SDCM/L90 B10:** < 3 / 50000

### Electrical features

**Driver included:** YES

**Driver position:** integrated

**Driver type:** On-Off

**Isolation class:** Class III

### Optical features

**Beam angle:** 57°/87°

**Optical type, adjustability:** Fixed

**Interchangeable optic (IOS):** NO

### Physical features

**Material:** Aluminium

**Diffusing screen:** Prismatic

**Fixing:** Ceiling

**Finishing:** Black (Standard)


Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

### Reggiani SPA Illuminazione

Viale Monza, 16 20845 Sovico (MB) Italy  
Tel. (+39) 039 2071.1 fax (+39) 039 2071 999

www.reggiani.net  
contact@reggiani.net


## Tracks/channels



### Code 0.02465.0021 - Track 48V Recessed Trimless

Finishing: Black (Standard)  
 Length: 1000mm  
 Description: Accessories: drivers to be ordered separately  
 Cut-out: 50 mm


For installations with Yori Evo 48V and Yori Pendant 48V [with dimmer on board](#), use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



### Code 0.02466.0021 - Track 48V Recessed Trimless

Finishing: Black (Standard)  
 Length: 2000mm  
 Description: Accessories: drivers to be ordered separately  
 Cut-out: 50 mm


For installations with Yori Evo 48V and Yori Pendant 48V [with dimmer on board](#), use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



### Code 0.02467.0021 - Track 48V Recessed Trimless

Finishing: Black (Standard)  
 Length: 3000mm  
 Description: Accessories: drivers to be ordered separately  
 Cut-out: 50 mm


For installations with Yori Evo 48V and Yori Pendant 48V [with dimmer on board](#), use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



### Code 0.02401.0012 - Track 48V Recessed Trim

Finishing: Embossed matt white (Standard)  
 Length: 1000mm  
 Description: Accessories: drivers to be ordered separately  
 Cut-out: 28 mm


For installations with Yori Evo 48V and Yori Pendant 48V [with dimmer on board](#), use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



### Code 0.02401.0031 - Track 48V Recessed Trim

Finishing: Embossed matt black (Standard)  
 Length: 1000mm  
 Description: Accessories: drivers to be ordered separately  
 Cut-out: 28 mm

For installations with Yori Evo 48V and Yori Pendant 48V [with dimmer on board](#), use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




### Code 0.02402.0012 - Track 48V Recessed Trim

Finishing: Embossed matt white (Standard)  
 Length: 2000mm  
 Description: Accessories: drivers to be ordered separately  
 Cut-out: 28 mm

For installations with Yori Evo 48V and Yori Pendant 48V [with dimmer on board](#), use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.

Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).


## Tracks/channels



### Code 0.02402.0031 - Track 48V Recessed Trim

Finishing: Embossed matt black (Standard)  
 Length: 2000mm  
 Description: Accessories: drivers to be ordered separately  
 Cut-out: 28 mm


For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



### Code 0.02403.0012 - Track 48V Recessed Trim

Finishing: Embossed matt white (Standard)  
 Length: 3000mm  
 Description: Accessories: drivers to be ordered separately  
 Cut-out: 28 mm


For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



### Code 0.02403.0031 - Track 48V Recessed Trim

Finishing: Embossed matt black (Standard)  
 Length: 3000mm  
 Description: Accessories: drivers to be ordered separately  
 Cut-out: 28 mm


For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



### Code 0.02445.0021 - Track 48V High Recessed Trimless

Finishing: Black (Standard)  
 Length: 1000mm  
 Description: Accessories: drivers to be ordered separately  
 Cut-out: 56,5 mm


For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



### Code 0.02446.0021 - Track 48V High Recessed Trimless

Finishing: Black (Standard)  
 Length: 2000mm  
 Description: Accessories: drivers to be ordered separately  
 Cut-out: 56,5 mm

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




### Code 0.02447.0021 - Track 48V High Recessed Trimless

Finishing: Black (Standard)  
 Length: 3000mm  
 Description: Accessories: drivers to be ordered separately  
 Cut-out: 56,5 mm

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.

Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

## Tracks/channels




### Code 0.02450.0012 - Track 48V Surface slim

Finishing: Embossed matt white (Standard)

Length: 1000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




### Code 0.02450.0031 - Track 48V Surface slim

Finishing: Embossed matt black (Standard)

Length: 1000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




### Code 0.02451.0012 - Track 48V Surface slim

Finishing: Embossed matt white (Standard)

Length: 2000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




### Code 0.02451.0031 - Track 48V Surface slim

Finishing: Embossed matt black (Standard)

Length: 2000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




### Code 0.02452.0012 - Track 48V Surface slim

Finishing: Embossed matt white (Standard)

Length: 3000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



### Code 0.02452.0031 - Track 48V Surface slim


Finishing: Embossed matt black (Standard)

Length: 3000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.

## Tracks/channels




### Code 0.02455.0012 - Track 48V Surface-Pendant

Finishing: Embossed matt white (Standard)

Length: 1000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




### Code 0.02455.0031 - Track 48V Surface-Pendant

Finishing: Embossed matt black (Standard)

Length: 1000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




### Code 0.02456.0012 - Track 48V Surface-Pendant

Finishing: Embossed matt white (Standard)

Length: 2000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




### Code 0.02456.0031 - Track 48V Surface-Pendant

Finishing: Embossed matt black (Standard)

Length: 2000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




### Code 0.02457.0012 - Track 48V Surface-Pendant

Finishing: Embossed matt white (Standard)

Length: 3000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



### Code 0.02457.0031 - Track 48V Surface-Pendant



Finishing: Embossed matt black (Standard)

Length: 3000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.

## Tracks/channels





### Code 0.02460.0012 - Track 48V High Surface/Pendant

Finishing: Embossed matt white (Standard)

Length: 1000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.





### Code 0.02460.0031 - Track 48V High Surface/Pendant

Finishing: Embossed matt black (Standard)

Length: 1000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.





### Code 0.02461.0012 - Track 48V High Surface/Pendant

Finishing: Embossed matt white (Standard)

Length: 2000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.





### Code 0.02461.0031 - Track 48V High Surface/Pendant

Finishing: Embossed matt black (Standard)

Length: 2000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.





### Code 0.02462.0012 - Track 48V High Surface/Pendant

Finishing: Embossed matt white (Standard)

Length: 3000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



### Code 0.02462.0031 - Track 48V High Surface/Pendant


Finishing: Embossed matt black (Standard)

Length: 3000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.

Indoor | 48V fixtures | Yori Linear 48V / Prismatic

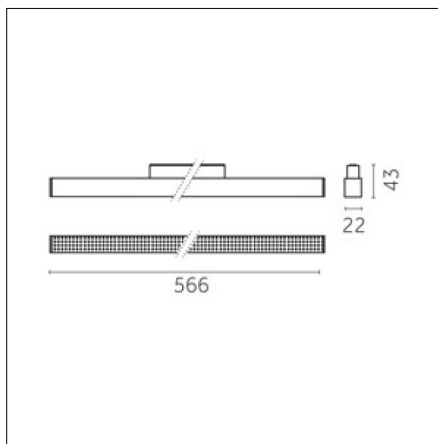

Very wide 57°/87°

21

IP20



Risk 1

850°



**Code 0.CN430.HN21**

### Light source features

**Number of light sources:** 1

**Source type:** LED HN

**Watt:** 10.8W

**Lm:** 1620lm

**Lm/W:** 150lm/W

**Kelvin/CRI:** 4000K / >90

**SDCM/L90 B10:** < 3 / 50000

### Electrical features

**Driver included:** YES

**Driver position:** integrated

**Driver type:** On-Off

**Isolation class:** Class III

### Optical features

**Beam angle:** 57°/87°

**Optical type, adjustability:** Fixed

**Interchangeable optic (IOS):** NO

### Physical features

**Material:** Aluminium

**Diffusing screen:** Prismatic

**Fixing:** Ceiling

**Finishing:** Black (Standard)

Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).


### Reggiani SPA Illuminazione

Viale Monza, 16 20845 Sovico (MB) Italy  
Tel. (+39) 039 2071.1 fax (+39) 039 2071 999

www.reggiani.net  
contact@reggiani.net




## Tracks/channels



### Code 0.02465.0021 - Track 48V Recessed Trimless

Finishing: Black (Standard)  
 Length: 1000mm  
 Description: Accessories: drivers to be ordered separately  
 Cut-out: 50 mm


For installations with Yori Evo 48V and Yori Pendant 48V [with dimmer on board](#), use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



### Code 0.02466.0021 - Track 48V Recessed Trimless

Finishing: Black (Standard)  
 Length: 2000mm  
 Description: Accessories: drivers to be ordered separately  
 Cut-out: 50 mm


For installations with Yori Evo 48V and Yori Pendant 48V [with dimmer on board](#), use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



### Code 0.02467.0021 - Track 48V Recessed Trimless

Finishing: Black (Standard)  
 Length: 3000mm  
 Description: Accessories: drivers to be ordered separately  
 Cut-out: 50 mm


For installations with Yori Evo 48V and Yori Pendant 48V [with dimmer on board](#), use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



### Code 0.02401.0012 - Track 48V Recessed Trim

Finishing: Embossed matt white (Standard)  
 Length: 1000mm  
 Description: Accessories: drivers to be ordered separately  
 Cut-out: 28 mm


For installations with Yori Evo 48V and Yori Pendant 48V [with dimmer on board](#), use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



### Code 0.02401.0031 - Track 48V Recessed Trim

Finishing: Embossed matt black (Standard)  
 Length: 1000mm  
 Description: Accessories: drivers to be ordered separately  
 Cut-out: 28 mm

For installations with Yori Evo 48V and Yori Pendant 48V [with dimmer on board](#), use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



### Code 0.02402.0012 - Track 48V Recessed Trim


Finishing: Embossed matt white (Standard)  
 Length: 2000mm  
 Description: Accessories: drivers to be ordered separately  
 Cut-out: 28 mm

For installations with Yori Evo 48V and Yori Pendant 48V [with dimmer on board](#), use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.

Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).




## Tracks/channels



### Code 0.02402.0031 - Track 48V Recessed Trim

Finishing: Embossed matt black (Standard)  
 Length: 2000mm  
 Description: Accessories: drivers to be ordered separately  
 Cut-out: 28 mm


For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



### Code 0.02403.0012 - Track 48V Recessed Trim

Finishing: Embossed matt white (Standard)  
 Length: 3000mm  
 Description: Accessories: drivers to be ordered separately  
 Cut-out: 28 mm


For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



### Code 0.02403.0031 - Track 48V Recessed Trim

Finishing: Embossed matt black (Standard)  
 Length: 3000mm  
 Description: Accessories: drivers to be ordered separately  
 Cut-out: 28 mm


For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



### Code 0.02445.0021 - Track 48V High Recessed Trimless

Finishing: Black (Standard)  
 Length: 1000mm  
 Description: Accessories: drivers to be ordered separately  
 Cut-out: 56,5 mm


For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



### Code 0.02446.0021 - Track 48V High Recessed Trimless

Finishing: Black (Standard)  
 Length: 2000mm  
 Description: Accessories: drivers to be ordered separately  
 Cut-out: 56,5 mm

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




### Code 0.02447.0021 - Track 48V High Recessed Trimless

Finishing: Black (Standard)  
 Length: 3000mm  
 Description: Accessories: drivers to be ordered separately  
 Cut-out: 56,5 mm

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.

Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

## Tracks/channels




### Code 0.02450.0012 - Track 48V Surface slim

Finishing: Embossed matt white (Standard)

Length: 1000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




### Code 0.02450.0031 - Track 48V Surface slim

Finishing: Embossed matt black (Standard)

Length: 1000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




### Code 0.02451.0012 - Track 48V Surface slim

Finishing: Embossed matt white (Standard)

Length: 2000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




### Code 0.02451.0031 - Track 48V Surface slim

Finishing: Embossed matt black (Standard)

Length: 2000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




### Code 0.02452.0012 - Track 48V Surface slim

Finishing: Embossed matt white (Standard)

Length: 3000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



### Code 0.02452.0031 - Track 48V Surface slim


Finishing: Embossed matt black (Standard)

Length: 3000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.

## Tracks/channels




### Code 0.02455.0012 - Track 48V Surface-Pendant

Finishing: Embossed matt white (Standard)

Length: 1000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




### Code 0.02455.0031 - Track 48V Surface-Pendant

Finishing: Embossed matt black (Standard)

Length: 1000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




### Code 0.02456.0012 - Track 48V Surface-Pendant

Finishing: Embossed matt white (Standard)

Length: 2000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




### Code 0.02456.0031 - Track 48V Surface-Pendant

Finishing: Embossed matt black (Standard)

Length: 2000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




### Code 0.02457.0012 - Track 48V Surface-Pendant

Finishing: Embossed matt white (Standard)

Length: 3000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



### Code 0.02457.0031 - Track 48V Surface-Pendant



Finishing: Embossed matt black (Standard)

Length: 3000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.

## Tracks/channels





### Code 0.02460.0012 - Track 48V High Surface/Pendant

Finishing: Embossed matt white (Standard)

Length: 1000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.





### Code 0.02460.0031 - Track 48V High Surface/Pendant

Finishing: Embossed matt black (Standard)

Length: 1000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.





### Code 0.02461.0012 - Track 48V High Surface/Pendant

Finishing: Embossed matt white (Standard)

Length: 2000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.





### Code 0.02461.0031 - Track 48V High Surface/Pendant

Finishing: Embossed matt black (Standard)

Length: 2000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.





### Code 0.02462.0012 - Track 48V High Surface/Pendant

Finishing: Embossed matt white (Standard)

Length: 3000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



### Code 0.02462.0031 - Track 48V High Surface/Pendant


Finishing: Embossed matt black (Standard)

Length: 3000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.

Indoor | 48V fixtures | Yori Linear 48V / Prismatic

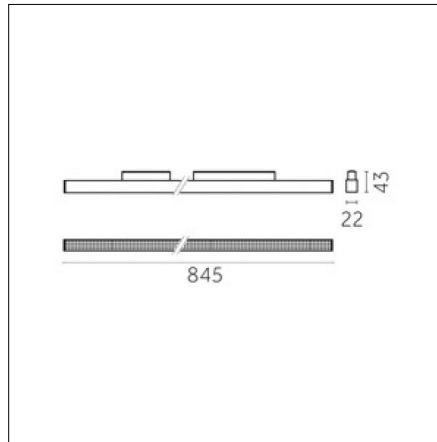

Very wide 57°/87°

21

IP20



Risk 1

850°



**Code 0.CN450.HN21**

### Light source features

**Number of light sources:** 1

**Source type:** LED HN

**Watt:** 16.2W

**Lm:** 2193lm

**Lm/W:** 150lm/W

**Kelvin/CRI:** 4000K / >90

**SDCM/L90 B10:** < 3 / 50000

### Electrical features

**Driver included:** YES

**Driver position:** integrated

**Driver type:** On-Off

**Isolation class:** Class III

### Optical features

**Beam angle:** 57°/87°

**Optical type, adjustability:** Fixed

**Interchangeable optic (IOS):** NO

### Physical features

**Material:** Aluminium

**Diffusing screen:** Prismatic

**Fixing:** Ceiling

**Finishing:** Black (Standard)


Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

### Reggiani SPA Illuminazione

Viale Monza, 16 20845 Sovico (MB) Italy  
Tel. (+39) 039 2071.1 fax (+39) 039 2071 999

www.reggiani.net  
contact@reggiani.net


## Tracks/channels



### Code 0.02465.0021 - Track 48V Recessed Trimless

Finishing: Black (Standard)  
 Length: 1000mm  
 Description: Accessories: drivers to be ordered separately  
 Cut-out: 50 mm


For installations with Yori Evo 48V and Yori Pendant 48V [with dimmer on board](#), use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



### Code 0.02466.0021 - Track 48V Recessed Trimless

Finishing: Black (Standard)  
 Length: 2000mm  
 Description: Accessories: drivers to be ordered separately  
 Cut-out: 50 mm


For installations with Yori Evo 48V and Yori Pendant 48V [with dimmer on board](#), use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



### Code 0.02467.0021 - Track 48V Recessed Trimless

Finishing: Black (Standard)  
 Length: 3000mm  
 Description: Accessories: drivers to be ordered separately  
 Cut-out: 50 mm


For installations with Yori Evo 48V and Yori Pendant 48V [with dimmer on board](#), use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



### Code 0.02401.0012 - Track 48V Recessed Trim

Finishing: Embossed matt white (Standard)  
 Length: 1000mm  
 Description: Accessories: drivers to be ordered separately  
 Cut-out: 28 mm


For installations with Yori Evo 48V and Yori Pendant 48V [with dimmer on board](#), use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



### Code 0.02401.0031 - Track 48V Recessed Trim

Finishing: Embossed matt black (Standard)  
 Length: 1000mm  
 Description: Accessories: drivers to be ordered separately  
 Cut-out: 28 mm

For installations with Yori Evo 48V and Yori Pendant 48V [with dimmer on board](#), use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




### Code 0.02402.0012 - Track 48V Recessed Trim

Finishing: Embossed matt white (Standard)  
 Length: 2000mm  
 Description: Accessories: drivers to be ordered separately  
 Cut-out: 28 mm

For installations with Yori Evo 48V and Yori Pendant 48V [with dimmer on board](#), use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.


## Tracks/channels



### Code 0.02402.0031 - Track 48V Recessed Trim

Finishing: Embossed matt black (Standard)  
 Length: 2000mm  
 Description: Accessories: drivers to be ordered separately  
 Cut-out: 28 mm


For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



### Code 0.02403.0012 - Track 48V Recessed Trim

Finishing: Embossed matt white (Standard)  
 Length: 3000mm  
 Description: Accessories: drivers to be ordered separately  
 Cut-out: 28 mm


For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



### Code 0.02403.0031 - Track 48V Recessed Trim

Finishing: Embossed matt black (Standard)  
 Length: 3000mm  
 Description: Accessories: drivers to be ordered separately  
 Cut-out: 28 mm


For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



### Code 0.02445.0021 - Track 48V High Recessed Trimless

Finishing: Black (Standard)  
 Length: 1000mm  
 Description: Accessories: drivers to be ordered separately  
 Cut-out: 56,5 mm


For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



### Code 0.02446.0021 - Track 48V High Recessed Trimless

Finishing: Black (Standard)  
 Length: 2000mm  
 Description: Accessories: drivers to be ordered separately  
 Cut-out: 56,5 mm

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



### Code 0.02447.0021 - Track 48V High Recessed Trimless


Finishing: Black (Standard)  
 Length: 3000mm  
 Description: Accessories: drivers to be ordered separately  
 Cut-out: 56,5 mm

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.

Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).



## Tracks/channels




### Code 0.02450.0012 - Track 48V Surface slim

Finishing: Embossed matt white (Standard)

Length: 1000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




### Code 0.02450.0031 - Track 48V Surface slim

Finishing: Embossed matt black (Standard)

Length: 1000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




### Code 0.02451.0012 - Track 48V Surface slim

Finishing: Embossed matt white (Standard)

Length: 2000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




### Code 0.02451.0031 - Track 48V Surface slim

Finishing: Embossed matt black (Standard)

Length: 2000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




### Code 0.02452.0012 - Track 48V Surface slim

Finishing: Embossed matt white (Standard)

Length: 3000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



### Code 0.02452.0031 - Track 48V Surface slim


Finishing: Embossed matt black (Standard)

Length: 3000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.

## Tracks/channels




### Code 0.02455.0012 - Track 48V Surface-Pendant

Finishing: Embossed matt white (Standard)

Length: 1000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




### Code 0.02455.0031 - Track 48V Surface-Pendant

Finishing: Embossed matt black (Standard)

Length: 1000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




### Code 0.02456.0012 - Track 48V Surface-Pendant

Finishing: Embossed matt white (Standard)

Length: 2000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




### Code 0.02456.0031 - Track 48V Surface-Pendant

Finishing: Embossed matt black (Standard)

Length: 2000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




### Code 0.02457.0012 - Track 48V Surface-Pendant

Finishing: Embossed matt white (Standard)

Length: 3000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



### Code 0.02457.0031 - Track 48V Surface-Pendant



Finishing: Embossed matt black (Standard)

Length: 3000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.

## Tracks/channels





### Code 0.02460.0012 - Track 48V High Surface/Pendant

Finishing: Embossed matt white (Standard)

Length: 1000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.





### Code 0.02460.0031 - Track 48V High Surface/Pendant

Finishing: Embossed matt black (Standard)

Length: 1000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.





### Code 0.02461.0012 - Track 48V High Surface/Pendant

Finishing: Embossed matt white (Standard)

Length: 2000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.





### Code 0.02461.0031 - Track 48V High Surface/Pendant

Finishing: Embossed matt black (Standard)

Length: 2000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.





### Code 0.02462.0012 - Track 48V High Surface/Pendant

Finishing: Embossed matt white (Standard)

Length: 3000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



### Code 0.02462.0031 - Track 48V High Surface/Pendant


Finishing: Embossed matt black (Standard)

Length: 3000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.

Indoor | 48V fixtures | Yori Linear 48V / Prismatic

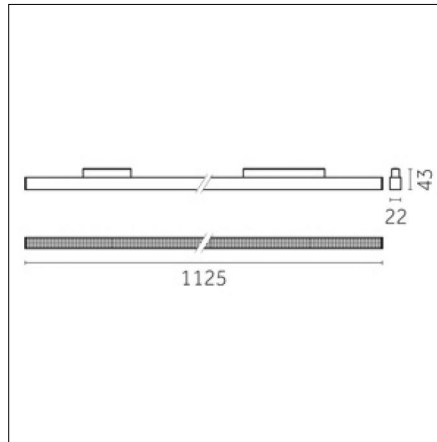

Very wide 57°/87°

21

IP20



Risk 1

850°



**Code 0.CN460.HN21**

### Light source features

**Number of light sources:** 1

**Source type:** LED HN

**Watt:** 21.6W

**Lm:** 3240lm

**Lm/W:** 150lm/W

**Kelvin/CRI:** 4000K / >90

**SDCM/L90 B10:** < 3 / 50000

### Electrical features

**Driver included:** YES

**Driver position:** integrated

**Driver type:** On-Off

**Isolation class:** Class III

### Optical features

**Beam angle:** 57°/87°

**Optical type, adjustability:** Fixed

**Interchangeable optic (IOS):** NO

### Physical features

**Material:** Aluminium

**Diffusing screen:** Prismatic

**Fixing:** Ceiling

**Finishing:** Black (Standard)


Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

**Reggiani SPA Illuminazione**

Viale Monza, 16 20845 Sovico (MB) Italy  
Tel. (+39) 039 2071.1 fax (+39) 039 2071 999

www.reggiani.net  
contact@reggiani.net


## Tracks/channels



### Code 0.02465.0021 - Track 48V Recessed Trimless

Finishing: Black (Standard)  
 Length: 1000mm  
 Description: Accessories: drivers to be ordered separately  
 Cut-out: 50 mm


For installations with Yori Evo 48V and Yori Pendant 48V [with dimmer on board](#), use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



### Code 0.02466.0021 - Track 48V Recessed Trimless

Finishing: Black (Standard)  
 Length: 2000mm  
 Description: Accessories: drivers to be ordered separately  
 Cut-out: 50 mm


For installations with Yori Evo 48V and Yori Pendant 48V [with dimmer on board](#), use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



### Code 0.02467.0021 - Track 48V Recessed Trimless

Finishing: Black (Standard)  
 Length: 3000mm  
 Description: Accessories: drivers to be ordered separately  
 Cut-out: 50 mm


For installations with Yori Evo 48V and Yori Pendant 48V [with dimmer on board](#), use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



### Code 0.02401.0012 - Track 48V Recessed Trim

Finishing: Embossed matt white (Standard)  
 Length: 1000mm  
 Description: Accessories: drivers to be ordered separately  
 Cut-out: 28 mm


For installations with Yori Evo 48V and Yori Pendant 48V [with dimmer on board](#), use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



### Code 0.02401.0031 - Track 48V Recessed Trim

Finishing: Embossed matt black (Standard)  
 Length: 1000mm  
 Description: Accessories: drivers to be ordered separately  
 Cut-out: 28 mm

For installations with Yori Evo 48V and Yori Pendant 48V [with dimmer on board](#), use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




### Code 0.02402.0012 - Track 48V Recessed Trim

Finishing: Embossed matt white (Standard)  
 Length: 2000mm  
 Description: Accessories: drivers to be ordered separately  
 Cut-out: 28 mm

For installations with Yori Evo 48V and Yori Pendant 48V [with dimmer on board](#), use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.

Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).


## Tracks/channels



### Code 0.02402.0031 - Track 48V Recessed Trim

Finishing: Embossed matt black (Standard)  
 Length: 2000mm  
 Description: Accessories: drivers to be ordered separately  
 Cut-out: 28 mm


For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



### Code 0.02403.0012 - Track 48V Recessed Trim

Finishing: Embossed matt white (Standard)  
 Length: 3000mm  
 Description: Accessories: drivers to be ordered separately  
 Cut-out: 28 mm


For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



### Code 0.02403.0031 - Track 48V Recessed Trim

Finishing: Embossed matt black (Standard)  
 Length: 3000mm  
 Description: Accessories: drivers to be ordered separately  
 Cut-out: 28 mm


For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



### Code 0.02445.0021 - Track 48V High Recessed Trimless

Finishing: Black (Standard)  
 Length: 1000mm  
 Description: Accessories: drivers to be ordered separately  
 Cut-out: 56,5 mm


For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



### Code 0.02446.0021 - Track 48V High Recessed Trimless

Finishing: Black (Standard)  
 Length: 2000mm  
 Description: Accessories: drivers to be ordered separately  
 Cut-out: 56,5 mm

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




### Code 0.02447.0021 - Track 48V High Recessed Trimless

Finishing: Black (Standard)  
 Length: 3000mm  
 Description: Accessories: drivers to be ordered separately  
 Cut-out: 56,5 mm

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.

Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

## Tracks/channels




### Code 0.02450.0012 - Track 48V Surface slim

Finishing: Embossed matt white (Standard)

Length: 1000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




### Code 0.02450.0031 - Track 48V Surface slim

Finishing: Embossed matt black (Standard)

Length: 1000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




### Code 0.02451.0012 - Track 48V Surface slim

Finishing: Embossed matt white (Standard)

Length: 2000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




### Code 0.02451.0031 - Track 48V Surface slim

Finishing: Embossed matt black (Standard)

Length: 2000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




### Code 0.02452.0012 - Track 48V Surface slim

Finishing: Embossed matt white (Standard)

Length: 3000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



### Code 0.02452.0031 - Track 48V Surface slim

Finishing: Embossed matt black (Standard)


Length: 3000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



## Tracks/channels




### Code 0.02455.0012 - Track 48V Surface-Pendant

Finishing: Embossed matt white (Standard)

Length: 1000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




### Code 0.02455.0031 - Track 48V Surface-Pendant

Finishing: Embossed matt black (Standard)

Length: 1000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




### Code 0.02456.0012 - Track 48V Surface-Pendant

Finishing: Embossed matt white (Standard)

Length: 2000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




### Code 0.02456.0031 - Track 48V Surface-Pendant

Finishing: Embossed matt black (Standard)

Length: 2000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




### Code 0.02457.0012 - Track 48V Surface-Pendant

Finishing: Embossed matt white (Standard)

Length: 3000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



### Code 0.02457.0031 - Track 48V Surface-Pendant



Finishing: Embossed matt black (Standard)

Length: 3000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.

## Tracks/channels





### Code 0.02460.0012 - Track 48V High Surface/Pendant

Finishing: Embossed matt white (Standard)

Length: 1000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.





### Code 0.02460.0031 - Track 48V High Surface/Pendant

Finishing: Embossed matt black (Standard)

Length: 1000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.





### Code 0.02461.0012 - Track 48V High Surface/Pendant

Finishing: Embossed matt white (Standard)

Length: 2000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.





### Code 0.02461.0031 - Track 48V High Surface/Pendant

Finishing: Embossed matt black (Standard)

Length: 2000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.





### Code 0.02462.0012 - Track 48V High Surface/Pendant

Finishing: Embossed matt white (Standard)

Length: 3000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



### Code 0.02462.0031 - Track 48V High Surface/Pendant


Finishing: Embossed matt black (Standard)

Length: 3000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.

Indoor | 48V fixtures | Yori Linear 48V / Prismatic

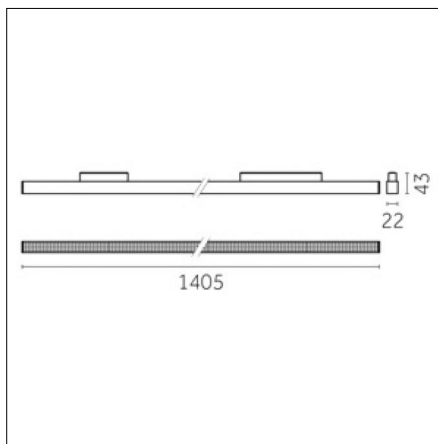

Very wide 57°/87°

21

IP20



Risk 1

850°



**Code 0.CN470.HN21**

### Light source features

**Number of light sources:** 1

**Source type:** LED HN

**Watt:** 27W

**Lm:** 4050lm

**Lm/W:** 150lm/W

**Kelvin/CRI:** 4000K / >90

**SDCM/L90 B10:** < 3 / 50000

### Electrical features

**Driver included:** YES

**Driver position:** integrated

**Driver type:** On-Off

**Isolation class:** Class III

### Optical features

**Beam angle:** 57°/87°

**Optical type, adjustability:** Fixed

**Interchangeable optic (IOS):** NO

### Physical features

**Material:** Aluminium

**Diffusing screen:** Prismatic

**Fixing:** Ceiling

**Finishing:** Black (Standard)


Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

### Reggiani SPA Illuminazione

Viale Monza, 16 20845 Sovico (MB) Italy  
Tel. (+39) 039 2071.1 fax (+39) 039 2071 999

www.reggiani.net  
contact@reggiani.net


## Tracks/channels



### Code 0.02465.0021 - Track 48V Recessed Trimless

Finishing: Black (Standard)  
 Length: 1000mm  
 Description: Accessories: drivers to be ordered separately  
 Cut-out: 50 mm


For installations with Yori Evo 48V and Yori Pendant 48V [with dimmer on board](#), use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



### Code 0.02466.0021 - Track 48V Recessed Trimless

Finishing: Black (Standard)  
 Length: 2000mm  
 Description: Accessories: drivers to be ordered separately  
 Cut-out: 50 mm


For installations with Yori Evo 48V and Yori Pendant 48V [with dimmer on board](#), use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



### Code 0.02467.0021 - Track 48V Recessed Trimless

Finishing: Black (Standard)  
 Length: 3000mm  
 Description: Accessories: drivers to be ordered separately  
 Cut-out: 50 mm


For installations with Yori Evo 48V and Yori Pendant 48V [with dimmer on board](#), use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



### Code 0.02401.0012 - Track 48V Recessed Trim

Finishing: Embossed matt white (Standard)  
 Length: 1000mm  
 Description: Accessories: drivers to be ordered separately  
 Cut-out: 28 mm


For installations with Yori Evo 48V and Yori Pendant 48V [with dimmer on board](#), use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



### Code 0.02401.0031 - Track 48V Recessed Trim

Finishing: Embossed matt black (Standard)  
 Length: 1000mm  
 Description: Accessories: drivers to be ordered separately  
 Cut-out: 28 mm

For installations with Yori Evo 48V and Yori Pendant 48V [with dimmer on board](#), use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




### Code 0.02402.0012 - Track 48V Recessed Trim

Finishing: Embossed matt white (Standard)  
 Length: 2000mm  
 Description: Accessories: drivers to be ordered separately  
 Cut-out: 28 mm

For installations with Yori Evo 48V and Yori Pendant 48V [with dimmer on board](#), use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.

Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).


## Tracks/channels



### Code 0.02402.0031 - Track 48V Recessed Trim

Finishing: Embossed matt black (Standard)  
 Length: 2000mm  
 Description: Accessories: drivers to be ordered separately  
 Cut-out: 28 mm


For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



### Code 0.02403.0012 - Track 48V Recessed Trim

Finishing: Embossed matt white (Standard)  
 Length: 3000mm  
 Description: Accessories: drivers to be ordered separately  
 Cut-out: 28 mm


For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



### Code 0.02403.0031 - Track 48V Recessed Trim

Finishing: Embossed matt black (Standard)  
 Length: 3000mm  
 Description: Accessories: drivers to be ordered separately  
 Cut-out: 28 mm


For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



### Code 0.02445.0021 - Track 48V High Recessed Trimless

Finishing: Black (Standard)  
 Length: 1000mm  
 Description: Accessories: drivers to be ordered separately  
 Cut-out: 56,5 mm


For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



### Code 0.02446.0021 - Track 48V High Recessed Trimless

Finishing: Black (Standard)  
 Length: 2000mm  
 Description: Accessories: drivers to be ordered separately  
 Cut-out: 56,5 mm

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




### Code 0.02447.0021 - Track 48V High Recessed Trimless

Finishing: Black (Standard)  
 Length: 3000mm  
 Description: Accessories: drivers to be ordered separately  
 Cut-out: 56,5 mm

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.

Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

## Tracks/channels




### Code 0.02450.0012 - Track 48V Surface slim

Finishing: Embossed matt white (Standard)

Length: 1000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




### Code 0.02450.0031 - Track 48V Surface slim

Finishing: Embossed matt black (Standard)

Length: 1000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




### Code 0.02451.0012 - Track 48V Surface slim

Finishing: Embossed matt white (Standard)

Length: 2000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




### Code 0.02451.0031 - Track 48V Surface slim

Finishing: Embossed matt black (Standard)

Length: 2000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




### Code 0.02452.0012 - Track 48V Surface slim

Finishing: Embossed matt white (Standard)

Length: 3000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



### Code 0.02452.0031 - Track 48V Surface slim


Finishing: Embossed matt black (Standard)

Length: 3000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.

## Tracks/channels




### Code 0.02455.0012 - Track 48V Surface-Pendant

Finishing: Embossed matt white (Standard)

Length: 1000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




### Code 0.02455.0031 - Track 48V Surface-Pendant

Finishing: Embossed matt black (Standard)

Length: 1000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




### Code 0.02456.0012 - Track 48V Surface-Pendant

Finishing: Embossed matt white (Standard)

Length: 2000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




### Code 0.02456.0031 - Track 48V Surface-Pendant

Finishing: Embossed matt black (Standard)

Length: 2000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




### Code 0.02457.0012 - Track 48V Surface-Pendant

Finishing: Embossed matt white (Standard)

Length: 3000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



### Code 0.02457.0031 - Track 48V Surface-Pendant

Finishing: Embossed matt black (Standard)



Length: 3000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



## Tracks/channels





### Code 0.02460.0012 - Track 48V High Surface/Pendant

Finishing: Embossed matt white (Standard)

Length: 1000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.





### Code 0.02460.0031 - Track 48V High Surface/Pendant

Finishing: Embossed matt black (Standard)

Length: 1000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.





### Code 0.02461.0012 - Track 48V High Surface/Pendant

Finishing: Embossed matt white (Standard)

Length: 2000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.





### Code 0.02461.0031 - Track 48V High Surface/Pendant

Finishing: Embossed matt black (Standard)

Length: 2000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.





### Code 0.02462.0012 - Track 48V High Surface/Pendant

Finishing: Embossed matt white (Standard)

Length: 3000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



### Code 0.02462.0031 - Track 48V High Surface/Pendant

Finishing: Embossed matt black (Standard)

Length: 3000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.