


STX2.50

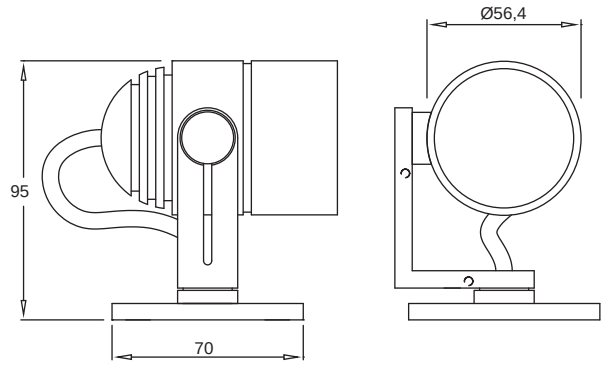

Order Code	STX2.50.module.reflector.finish
Example	STX2.50.3000K,1300lm XTM 9mm LES.17.9°.RAL9010

Materials:	Aluminium
Lamp:	Xicato XTM or XIM 9mm LES LED Module
Output:	See table on second page
CRI Ra:	≥80 or ≥95 Artist
Finish:	Anodised or painted to any RAL colour
Dimming:	XIM 1-10V or DALI XTM 1-10V, DMX, DALI, Mains or Dual Dim (Bluetooth 2016)
Supply:	XIM 48V DC XTM Constant current remote driver
Locking:	2.5mm allen key required
Available Tilt:	± 90°
Weight:	0.4kg
Description:	Surface mount lockable power LED spotlight using Xicato Module.
Accessories:	Ø50mm. Please refer to the table on the second page for reflector information. Takes two accessories. Barn door and wall washing attachments are also available

LED Information

This product uses the Xicato Module


Technical advantages of the Xicato Module:

- Colour consistency Initial; 1 x 2 SDCM
- Colour consistency Maintained; 3 SDCM
- Excellent colour rendering
- Uniform beam
- No multiple shadowing


For more information about the modules available please ask sales@mikestoanelighting.com for a current technical data sheet or visit www.xicato.com

Applications

Remote dimming
No local drivers

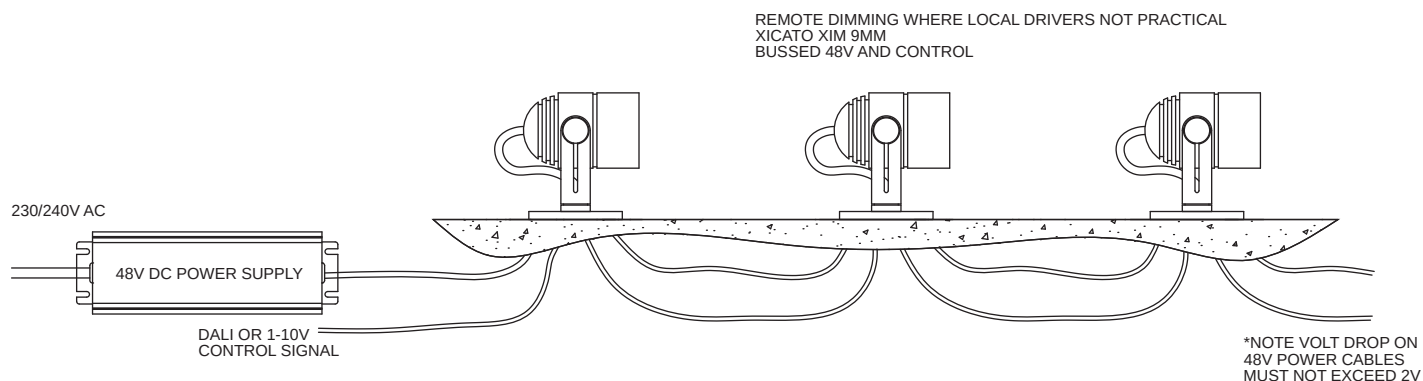

Remote dimming
Local drivers

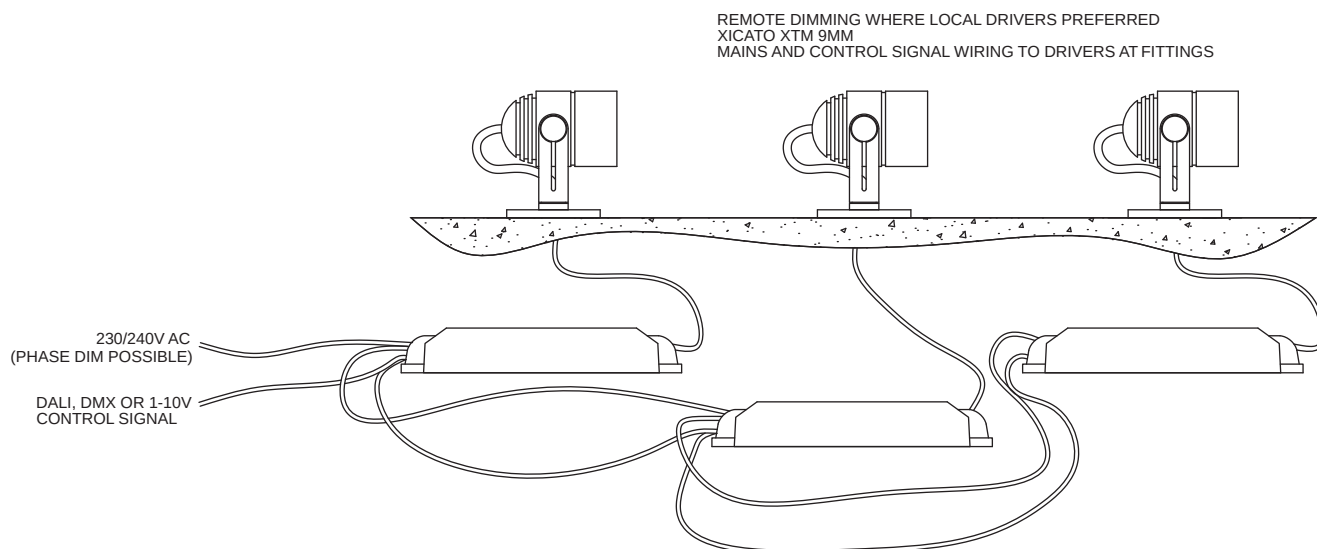

Type	Reflector diameter	Module type	Dimming and control options	Beam options	Max output and CRI
STX2.50	50mm	Xicato XIM 9mm LES	DALI 1-10V	17.9° 24.7° 39.1°	Artist Series 700lm Vibrant Series V95 700lm Standard Series 1300lm Vibrant Series V80 1300lm
		Xicato XTM 9mm LES	DALI 1-10V DMX Mains Dim Dual Dim (local pot and remote DALI or 1-10V)	17.9° 24.7° 39.1°	Artist Series 930lm Vibrant Series V95 930lm Standard Series 1300lm Vibrant Series V80 1300lm