



FABRIQuiet is a sound absorbing panel that is the perfect acoustic complement to FABRICore, delivering the same exceptional noise reduction capability with matching aesthetics to ensure design continuity throughout your space. Use on their own or clip together to form large cloud areas. Mix & match with FABRICore luminaires to combine immersive illumination with a complete acoustic solution for open area designs in a variety of applications.

Available with four (4) mounting options:

- Suspended
- Surface Mount
- Grid (T-Bar) Lay-in
- Recessed (Drywall/Plaster)

## ACOUSTIC PERFORMANCE

NRC Value*	0.60-1.00
ISO Classification	Class D

\*Dependent on mounting option

## MOUNTING DETAILS

- **Grid (T-Bar) – Metric:** no additional mounting kit is required. For use with 24mm T-bar.
- **Grid (T-Bar) – Imperial:** an additional kit (LACC-GR-K) is required that enables the luminaire to be mounted as a lay-in into a standard imperial T-bar ceiling. For use with 15/16" T-bar.
- **Surface Mount:** no additional mounting kit is required.
- **Recessed (Drywall/Plaster):** an additional kit (LACC-RC-K) is required to provide a trim for mounting within drywall or plaster ceilings.
- **Suspended:** an additional kit (LACC-SP-K) is required to provide mounting hardware for cable attachment to the panel. This kit also includes clips to secure panels to each other when grouped to form larger ceiling elements.


## GENERAL

Location	Indoor, dry location only
Storage Temperature	-40 – 85°C (-40 – 185 °F)
Relative Humidity	90% max (non-condensing)
Diffuser Material	Woven Polyester Fabric (coated)
Frame Material	Aluminum
Fire Rating	ASTM E 84 Class A EN:13501-1 Class B s1d0
Weight	11.3 kg (25 lb)

## CERTIFICATION



## DIMENSIONS

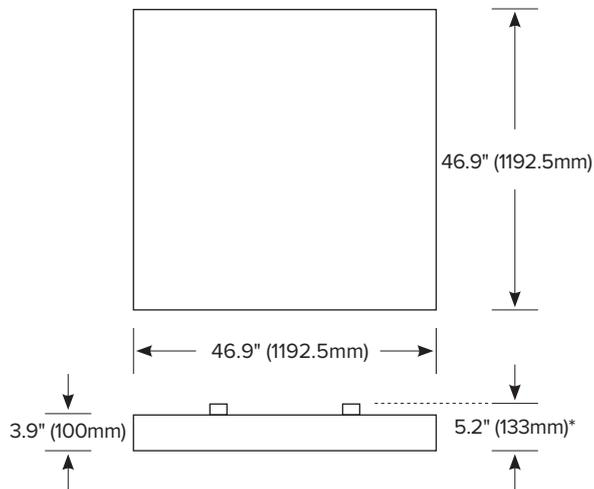

\*Surface Mount will have an opening of 1.3" (33mm) between the frame and the ceiling



Suspended Mounting Option (LACC-SP-K)

## HOW TO ORDER

### Acoustic Panel

LFQ - 1 - 2

#### 2 Finish Color

- B = Black
- W = White

### Mounting Kit

- Grid (T-Bar) – Metric: not required
- Grid (T-Bar) – Imperial: LACC-GR-K
- Recessed (Drywall/Plaster): LACC-RC-K
- Suspended: LACC-SP-K
- Surface Mount: not required

Example 1: Metric T-Bar Lay-in, White Finish  
Order Code = LFQ-W

Example 2: Imperial T-Bar Lay-in, White Finish  
Order Code = LFQ-W plus LACC-GR-K

Example 3: Suspended, Black Finish  
Order Code = LFQ-B plus LACC-SP-K